

Model Name NV2520SA

Voltage-Controlled Crystal Oscillator (VCXO)

Main Application

For Mobile TV, DSC, Navigation Device, DVD, Blu-ray, etc

Features

- A compact and thin. : 2.5 x 2.0 x H 0.9 mm.
- Frequency control range : Min. $\pm 100 \times 10^{-6}$
- Operating temperature range : -40 to +85°C
- Output level : CMOS
- Supports low current consumption.



Pb Free


RoHS Compliant
Directive 2011/65/EU

Specifications

Item	Model	NV2520SA						
Nominal frequency (MHz)		1.25 ≤ F < 10	10 ≤ F < 20	20 ≤ F < 30	30 ≤ F ≤ 40	40 < F < 50	50 ≤ F ≤ 65	65 < F ≤ 80
Supply voltage [V _{CC}] (V)		+3.3 ± 10 %						
Current consumption (mA)		Max. 3	Max. 4.5	Max. 5	Max. 6	Max. 9	Max. 10	Max. 11
Output level		CMOS						
Symmetry (%)		45 to 55						
Output load condition		15 pF						
Operating temperature range (°C)		-40 to +85						
Storage temperature range (°C)		-55 to +125						
Overall frequency tolerance		Max. $\pm 50 \times 10^{-6}$						
Frequency control range / Control voltage [V _{cont}]		Min. $\pm 100 \times 10^{-6}$ / + 1.65 ± 1.65 V						
Frequency change polarity		Positive						
Phase noise (dBc / Hz)	F _{out} ± 1kHz (typ.)	-145	-140	-135	-126	-119		
	F _{out} ± 100kHz (typ.)	-160	-156	-154	-151	-146		
Number for specifying an order		NSA3458A						

*This Product does not have Stand-by function.

Dimensions

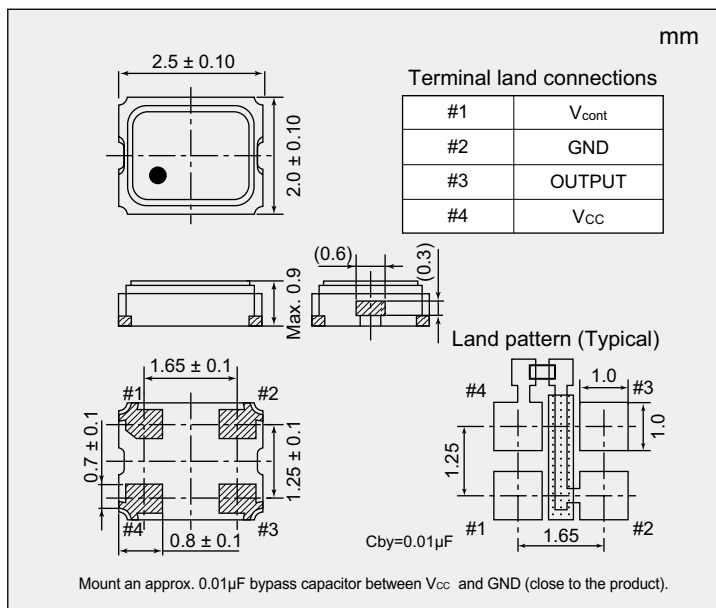

How to Specify an Order

When ordering our products, specify them with an "Ordering Code" that consists of the following:

Model name – Frequency (up to 9 digits) M – Number for specifying an order

Example: NV2520SA–27M–NSA3458A

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>)